

Roton Full Surface



Door of any Material • Standard and Heavy Duty


Standard Duty for medium frequency doors. To determine weight factors for Standard or Heavy Duty frequency doors, see section "Checking the load" on page C9. Heavy Duty for high frequency doors or heavy medium frequency doors.

780-210

780-210 HD



- ▲ **CLEARANCE:** None required for hinge side.
1-5/8" (41 mm) minimum frame face required plus 3/16" (5 mm) rotational clearance
- ▲ **FASTENERS:** Drill-Kwick® screws and Sexbolts
- ▲ **LENGTHOPTIONS:** Standard and Custom
- ▲ **DOOR REINFORCEMENT:** None required
- ▲ **FRAME REINFORCEMENT:** None required to 200 lbs.
Use 16 gauge channel at higher weight.
- ▲ **SPECIALFEATURES:** "Zero clearance" required for hinge side.
Can be used with any door and frame material.
Security moldings

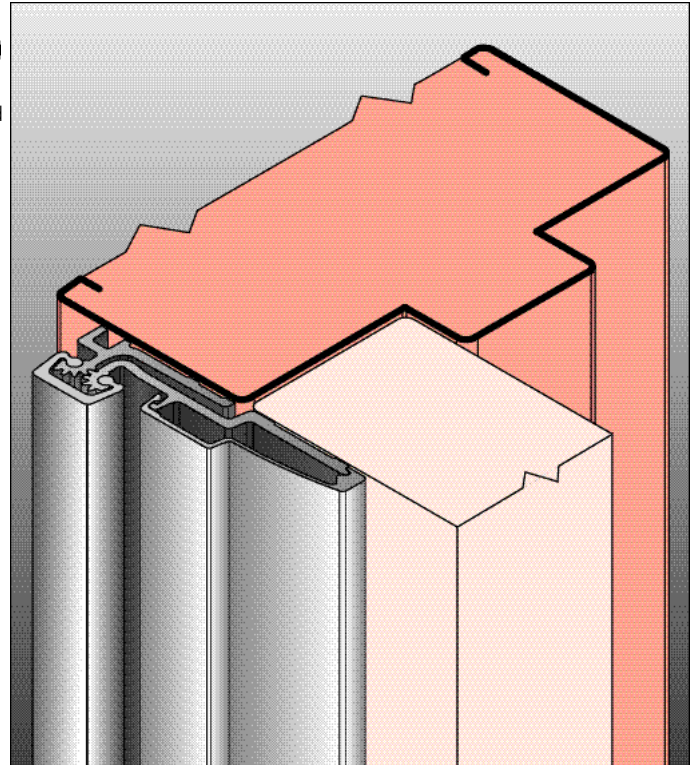

Roton model number	Length		Hole Count		
	Inches	Centimeters	# Sex bolts	# Pan Head	# for jamb
780-210	79	200.7	2	11	9
780-210	83	210.8	8	11	11
780-210	85	215.9	8	11	11
780-210	95	241.3	9	10	12
780-210	119	302.3	10	13	15
780-210HD	79	200.7	8	17	17
780-210HD	83	210.8	10	17	19
780-210HD	85	215.9	10	17	19
780-210HD	95	241.3	11	18	21
780-210HD	119	302.3	12	24	26

