



- PIN Access
- Mechanical Pushbutton Lock
- Single Access Code
- Fits Narrow Stile Aluminum Glass Doors
- Thumbturn

### Features

<b>Access Control:</b>	Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination.
<b>No Battery:</b>	Fully mechanical lock eliminates the material and labor expense of battery replacements
<b>Locking Device Options:</b>	Adams Rite 4510/4710/4910 mortise latch
<b>Number of Codes:</b>	Single access code—one easy to manage code for all users
<b>Programming:</b>	Lock is easily programmed via keypad without removing lock from the door
<b>Handing:</b>	Non-handed; Required drive assembly is factory handed—not field reversible
<b>Key Override:</b>	Accepts Maximum Security (MS) mortise cylinders; can be used to override the lock combination and gain access using a key. Allows facilities to initiate or maintain a master-keyed security system (keyed alike or keyed differently).
<b>Operation Modes:</b>	Single credential—access Passage—Allows access without using the lock entry code. Feature activated from the outside using cylinder override key. Lockout—Disables the lock so that entry codes cannot be used to gain access. Access is permitted using the key override only. This is activated from the outside using the cylinder override key.
<b>Economical:</b>	A cost effective access control solution

### Mechanical Features

<b>Construction:</b>	All metal cast front housing, force-proof, clutch-protected fixed thumbturn
<b>Numeric Keypad:</b>	Vandal resistant, solid metal pushbuttons
<b>Handing:</b>	Non-handed; Required drive assembly is factory handed—not field reversible
<b>Finishes:</b>	Satin Chrome 26D (626); 55 (695) Duranodic
<b>Backset:</b>	Model 3010: Right Hand; Right Hand Reverse— $31\frac{3}{32}$ " (25 mm) Model 3020: Left Hand; Left Hand Reverse— $31\frac{3}{32}$ " (25 mm) Model 3030: Right Hand; Right Hand Reverse— $1\frac{1}{8}$ " (29 mm) or $1\frac{1}{2}$ " (38 mm) Model 3040: Left Hand; Left Hand Reverse— $1\frac{1}{8}$ " (29 mm) or $1\frac{1}{2}$ " (38 mm)
<b>Latch:</b>	Purchased separately (Adams Rite)
<b>Stile Width:</b>	$1\frac{7}{8}$ " (48 mm) minimum, required for mounting
<b>Door Thickness:</b>	$1\frac{3}{4}$ " (44 mm) maximum
<b>Weight:</b>	4 lbs. (1.8 kg)
<b>Strike:</b>	Purchased separately (Adams Rite)
<b>Items Supplied Include:</b>	Installation instructions, full-scale template, combination change key, and screwdriver


### Certification and Testing

**Durability:** Highly weather resistant


### Warranty

**Warranty:** 1-year warranty

### Narrow Stile Aluminum Door Lock

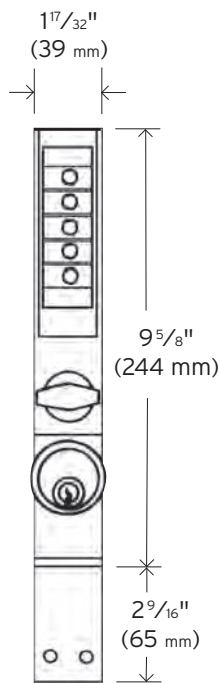


**Exterior**

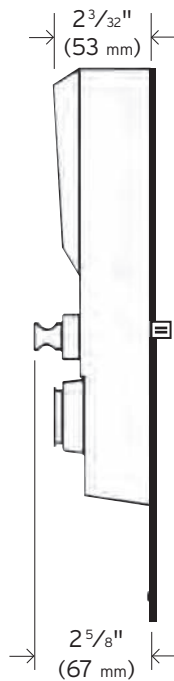


**Exterior Side**

#### Model 3001



- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout

#### Model 3002



- Combination Entry
- Key Override (not supplied)
- Passage
- Lockout
- Cylinder Guard