



HANCHETT
ENTRY
SYSTEMS, INC.



Page

- 2. 9500 Genesis II Fire Rated Electric Strike
- 2. 9600 Genesis Electric Strike
- 2. 1006U Heavy Duty Electric Strike Base Units
- 3. Faceplate Kits for 1006U Electric Strike Units
- 4. 5000U Heavy Duty, Low Profile Electric Strike Base Unit & Faceplate Kits
- 5. 7000U Heavy Duty Electric Strike Base Unit & Faceplate Kits
- 5. 7400U Heavy Duty Electric Strike Base Unit & Faceplate Kits
- 7. 7500 Series Heavy Duty Fire Rated Electric Strikes



Complete Door Hardware Solutions

Mid West 1-800-522-2940

FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371

South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

ELECTRIC STRIKES

9600 Genesis & 1006U Base Unit



HANCHETT
ENTRY
SYSTEMS, INC.

9500 GENESIS II & 9600 GENESIS ELECTRIC STRIKE

9500 Genesis II & 9600 Genesis

Both strikes are surface mounted and require no cutting of the door frame. A patent pending dual locking mechanism provides the holding force of two electric strikes in one. This offers twice the security, twice the resistance and twice the reliability of any strike. Genesis accommodates rim mounted panic exit devices and can be installed on metal, wood or aluminum jambs. Heavy duty stainless steel construction makes it ideal for high usage applications. Specify 9500 for UL 10C (90 minute) fire and Warnock Hershey rated device.

Standard Features:

- Horizontal adjustment
- Continuous duty operation
- Tamper resistant, stainless steel construction
- Non-handed
- Low current draw
- Plug-in connectors
- Internally mounted solenoid
- Horizontal lock down screws

Specifications:

Faceplate Size: 9" x 1-3/4" x 3/4"

Dual Voltage: 12V or 24V, AC/DC

Options:

- LBM Latchbolt Monitor
- LBSM Latch & Strike Monitor Switch
- 7000-108 Spacer Plate, *Order Separately*

Finishes:

- 630 Satin Stainless Steel
- 605 Bright Brass
- 612 Dull Bronze
- 613 Dark Bronze
- 651 Bright Chrome



HOW TO ORDER

9600-605 LBSM

Model		Finish		Options	
9500	Genesis II Fire Rated	630	Stainless Steel	LBM	Latchbolt Monitor
9600	Genesis Electric Strike	605	Bright Brass	LBSM	Latch & Strike Monitor Switch
		612	Dull Bronze	9600-108	Spacer Plate, Order Separately
		613	Dark Bronze		
		625	Bright Chrome		

1006U HEAVY DUTY ELECTRIC STRIKE BASE UNITS

1006U Electric Strike Base Units

1006U electric strikes are among the strongest and most versatile on the market. Each of the faceplate options are interchangeable, non-handed and built to provide proper alignment to accommodate virtually every type of lockset available. These include basic cylindrical latchbolts, offset mortise latchbolts and full mortise locksets with a latchbolt and a 1" deadbolt. Heavy duty, stainless steel construction makes these electric strikes ideal for high usage applications. For use with faceplate kits. An innovative dual action solenoid, combined with sophisticated tamper resistance features, transforms the 1006U from a standard electric strike into a highly secure access control device. The 1006 will accommodate all locksets and installs easily into a standard ANSI 4-7/8" cutout. 1006U Series is non-handed.

Standard Features:

- Internally mounted solenoid
- Horizontal adjustment
- Continuous duty operation
- Plug-in connectors
- 1003-105 "Goof Plate" adapter included

Specifications:

Dual Voltage: 12VDC/24VDC Field Selectable. 2001 Rectifier for AC operation.

Options:

- 1006-104 - Lip Extension Adapter, *Order Separately*

Faceplate Kit Options: *See next page.*

Finishes:

- 630 Satin Stainless Steel
- BLK Black



HOW TO ORDER

1006U-12/24VDC 630

Model		Voltage	Finish	
1006U	Strike Base Unit, Fail Secure	12/24VDC	630	Stainless Steel
1006UF	Strike Base Unit, Fail Safe		BLK	Black

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

FACEPLATE KIT OPTIONS FOR 1006U ELECTRIC STRIKE UNITS

K-KIT-U for use with mortise locksets with auxiliary dead-latch.

KD-KIT-U for use with mortise locksets with auxiliary dead-latch. For Sargent 7700/8100, Schlage L Series and Yale 87 Series.

KM-KIT-U specially designed to accommodate locks with deadlatches below the latchbolt. Including the 92 Falcon M Series and the Sargent 8200 Series Mortise Locksets.

N-KIT-U for use with mortise locksets where the deadbolt is used for night latch function only.

ND-KIT-U for use with mortise locksets where the deadbolt is used for night latch function only. For Sargent 7700/8100, Schlage L Series and Yale 87 Series.

NM-KIT-U for use with mortise locksets where the deadbolt is used for night latch function only. Specially designed to accommodate locks with deadlatches below the latchbolt.

A-KIT-U for use with mortise locksets with a normally extended 1" deadbolt.

AD-KIT-U for use with mortise locksets with a normally extended 1" deadbolt. For Sargent 7700/8100, Schlage L Series and Yale 87 Series.

AM-KIT-U for use with mortise locksets with a normally extended 1" deadbolt. Specially designed to accommodate locks with deadlatches below the latchbolt.

H-KIT-U for use with mortise locksets where the deadbolt is not released.

HD-KIT-U for use with mortise locksets where the deadbolt is not released. For Sargent 7700/8100, Schlage L Series and Yale 87 Series.

HM-KIT-U for use with mortise locksets where the deadbolt is not released. Specially designed to accommodate locks with deadlatches below the latchbolt.

J-KIT-U for use with cylindrical locksets up to 3/4" throw. All locksets with "centerlined" bolts (including tubular deadbolts) up to 1" throw.

J-2-KIT-U for use with cylindrical locks with up to 3/4" throw (9" cutout).

K-2-KIT-U for use with mortise locksets with auxiliary dead-latch (9" cutout).

T-KIT-U for use with mortise locksets with a 1" deadbolt and center auxiliary deadlatch.

TD-KIT-U for use with mortise locksets with 1" deadbolt and center auxiliary deadlatch. For Sargent 7700/8100, Schlage L Series and Yale 87 Series.


HOW TO ORDER

Faceplate kits can be ordered by specifying the item number (in bold) in the description.

Example: **K-KIT-U** or **A-KIT-U**.

FINISHES:

Standard: 630 stainless steel finish. Optional: 605, 606, 612, 613, 613C, 628C, 651, 652 & BLK.

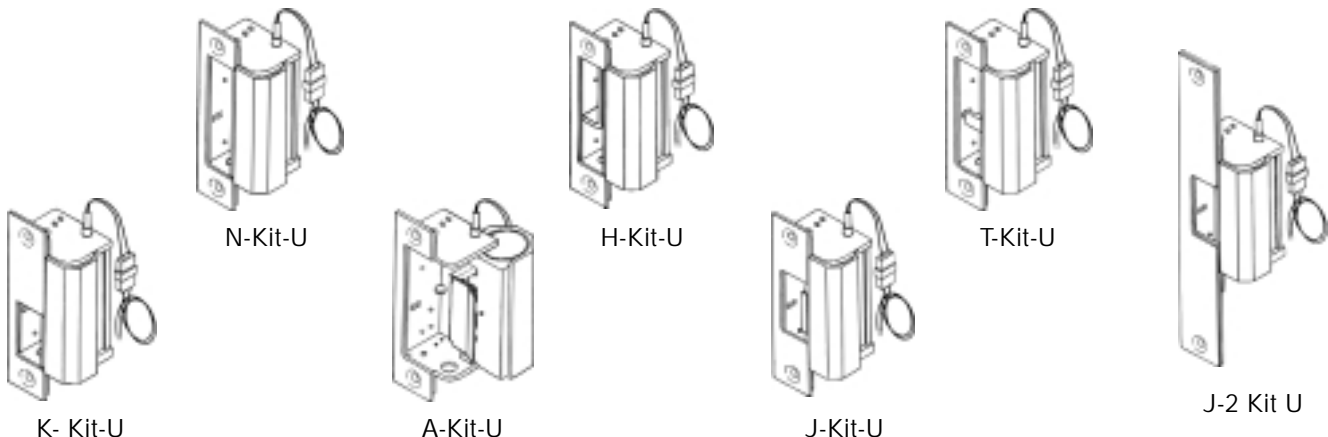

ELECTRIC STRIKES

5000U Base Unit & Faceplate Options



HANCHETT
ENTRY
SYSTEMS, INC.

5000U HEAVY DUTY, LOW PROFILE ELECTRIC STRIKE BASE UNIT

5000U Electric Strike Base Unit

The 5000U Strikes are the first "low profile" electric strikes designed to be truly "installer friendly". This base unit electric strikes are designed with an internally mounted solenoid for compactness and ease of installation in applications where there is limited space behind the door jamb. This includes narrow style door jambs, jambs with protruding glass inside, jambs filled with hardened concrete and wood jambs. Projects 1-1/16" into the frame cutout. For use with 500 series faceplate kits.

Standard Features:

- Tamper resistant
- Forcing strength 2,385 lbs.
- Minimum 500,000 cycles
- Field changeable - fail secure / fail safe
- Non-handed
- Internally mounted solenoid
- Continuous duty operation
- Plug-in connectors

Specifications:

Depth: 1-1/6"

Current Draw: .22 Amps.@12VDC, .11 Amps.@24VDC

Options:

- | | |
|---------------|---|
| Fail Safe | Locked When Energized |
| 5104 - 1/2" | Lip Extensions, <i>Order Separately</i> |
| 5104 - 1" | Lip Extensions, <i>Order Separately</i> |
| 5104 - 1-1/4" | Lip Extensions, <i>Order Separately</i> |
| 5104 - 3" | Lip Extensions, <i>Order Separately</i> |
| 5104 LIP-PAC | All Lip Extensions, <i>Order Separately</i> |



5104 Extension

HOW TO ORDER STRIKE

5000U-12DC

Model		Voltage
5000U	Strike Base Unit, Fail Secure	12DC
5000UF	Strike Base Unit, Fail Safe	24DC


FACEPLATE KIT OPTIONS FOR 5000U ELECTRIC STRIKES

- 501 4-7/8" x 1-1/4" with square corners, flat face.
- 501A 4-7/8" x 1-1/4" with rounded corners, flat face.
- 501B 4-7/8" x 1-1/4" with rounded corners, radius face.
- 502 7-15/16" x 1-1/4" with rounded corners, flat face.
- 503 6-7/8" x 1-3/8" with rounded corners, flat face.
- 503B 6-7/8" x 1-3/8" with rounded corners, radius face.
- 504 10" x 1-3/8" with rounded corners. 4 holes for mounting in wood frame.


HOW TO ORDER FACEPLATE

501-BLK


Faceplate Kit		Finish	
501	4-7/8" x 1-1/4", Square Corners, Flat Face	BLK	Black
501A	4-7/8" x 1-1/4", Rounded Corners, Flat Face	605	Bright Brass
501B	4-7/8" x 1-1/4", Round. Corners, Rad. Face	606	Satin Brass
502	7-15/16" x 1-1/4", Round. Corners, Flat Face	612	Satin Bronze
503	6-7/8" x 1-3/8", Round. Corners, Flat Face	613	Oil Rub Dk Brze
503B	6-7/8" x 1-3/8", Round. Corners, Rad. Face	630	Stainless Steel
504	10" x 1-3/8", Round. Corners, 4 Mtg. Holes	651	Bright Chrome




501




501A



501B



503



504

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

7000U HEAVY DUTY ELECTRIC STRIKE UNIT

7000U Electric Strike Base Unit

For use with cylindrical latchbolts and rim mounted panic exit devices. These heavy duty electric strikes have a unique pre-load release and internally mounted solenoid making them ideal for high usage applications. These are built to operate under a significant amount of door loading (fail secure only) caused by a warped or misaligned door, weatherstripping, smoke seal or any other condition that may bind the door. For use with 700 & 780 series faceplate kits.

Electrical:

Dual Voltage: 12V or 24V, AC/DC

Options:

Fail Safe
7000-108
LBM
2001

Locked When Energized

1/8" Spacer, *Order Separately*

Latchbolt Monitor

Rectifier for AC Operation, *Order Separately*

Standard Features:

- Tamper resistant, heavy duty construction
- Minimum 500,000 cycles
- Field reversible - fail secure / fail safe
- Door loading resistance (fail secure only)
- Non-handed
- Horizontal adjustment
- Internally mounted solenoid
- Continuous duty operation
- Plug-in connectors
- Includes trim enhancer and keeper shams.



HOW TO ORDER STRIKE

7000U-12DC

Model		Voltage
7000U	Strike Base Unit, Fail Secure	12DC
7000UF	Strike Base Unit, Fail Safe	24DC

FACEPLATE KIT OPTIONS FOR 7000U ELECTRIC STRIKES

701 For use with cylindrical locksets up to 5/8" throw.
Size: 4-7/8" x 1-1/4".

702 For use with cylindrical locksets up to 5/8" throw.
Size: 7-15/16" x 1-7/16".

783 For use with rim mounted panic devices with a pullman latch. Size: 9" x 1-3/4" x 11/16".

786 For use with rim mounted panic devices with a pullman latch. Size: 6-1/2" x 1-3/4" x 1/2".

789 For use with rim mounted panic devices with a pullman latch. Size: 9" x 1-3/4" x 1/2".

HOW TO ORDER FACEPLATE

701-10B

Faceplate Kit		Finish	
701	4-7/8" x 1-1/4", Up to 5/8" Throw, Cylindrical Lock	BLK	Black
702	7-15/16" x 1-7/16", Up to 5/8" Throw, Cyl. Lock	605	Bright Brass
783	9" x 1-3/4" x 11/16", For Use w/ Rim Panic Device	606	Satin Brass
786	6-1/2" x 1-3/4" x 1/2", For Use w/ Rim Panic Device	612	Satin Bronze
789	9" x 1-3/4" x 1/2", For Use w/ Rim Panic Device	613	Oil Rub Dk Bz
		630	Stainless Steel
		651	Bright Chrome



7000U w/
701 Option



7000U w/
702 Option



7000U w/
783 Option



7000U w/
789 Option



7000U w/
786 Option

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

CONTINUOUS HINGES

7400U Base Unit & Faceplate Options



HANCHETT
ENTRY
SYSTEMS, INC.

7400U HEAVY DUTY ELECTRIC STRIKE UNIT

7400U Electric Strike Base Unit

For use with rim mounted panic devices. 7400 Series Electric Strikes are heavy duty and are constructed of stainless steel. These units have a unique pre-load release feature which allows them to operate under a significant amount of door loading (fail secure only) caused by a warped or misaligned door, weatherstripping smoke seal or any other condition that may bind the door. For use with faceplate kits, when combined the 7400U will accommodate a variety of rim panic devices up to a 3/4" throw.

Electrical:

12VDC .45 AMPS
24VDC .24 AMPS

Options:

Fail Safe Locked When Energized
LBM Latchbolt Monitor, *Order Separately*
2001 Rectifier for AC Operation

Standard Features:

- Tamper, heavy duty construction
- Minimum 500,000 cycles
- Field reversible - fail secure / fail safe
- Door loading resistance, can operate under a pre-load condition (fail secure only)
- Non-handed
- Horizontal adjustment
- Internally mounted solenoid
- Continuous duty operation
- Plug-in connectors



HOW TO ORDER STRIKE

7400U-12DC

Model		Voltage
7000U	Strike Base Unit, Fail Secure	12DC
7000UF	Strike Base Unit, Fail Safe	24DC

FACEPLATE KIT OPTIONS FOR 7400U ELECTRIC STRIKES

783 For use with rim mounted panic devices with a pullman latch. Size: 9" x 1-3/4" x 11/16".

786 For use with rim mounted panic devices with a pullman latch. Size: 6-1/2" x 1-3/4" x 1/2".

789 For use with rim mounted panic devices with a pullman latch. Size: 9" x 1-3/4" x 1/2".

HOW TO ORDER FACEPLATE

783-BLK

Faceplate Kit		Finish	
783	9" x 1-3/4" x 11/16", For Use w/ Rim Panic Device	BLK	Black
786	6-1/2" x 1-3/4" x 1/2", For Use w/ Rim Panic Device	605	Bright Brass
789	9" x 1-3/4" x 1/2", For Use w/ Rim Panic Device	606	Satin Brass
		612	Satin Bronze
		613	Oil Rub Dk Bz
		630	Stainless Steel
		651	Bright Chrome



7000U w/
783 Option



7000U w/
786 Option



7000U w/
789 Option

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



HANCHETT
ENTRY
SYSTEMS, INC.

ELECTRIC STRIKES

7500 Series Heavy Duty Fire Rated

7500 SERIES HEAVY DUTY FIRE RATED ELECTRIC STRIKES

7500 Series Electric Strikes

7500 Series Strikes was designed for strength and durability. It is the best choice for cylindrical lockset applications in fire rated doors. These units are built to operate under 30 lbs. of door loading (fail secure only) caused by a warped or misaligned door, weatherstripping, smoke seal or any other condition that may bind the door.

Models:

7501 - For use with cylindrical locksets with up to a 5/8" throw. Faceplate Size: 4-7/8" x 1-1/4" x 1-1/2".

7505 - For use with cylindrical and mortise locksets with up to a 3/4" throw. Faceplate Size: 9-1/16" x 1-3/8" x 1-1/2".

Standard Features:

- Tamper resistant, heavy duty construction
- Minimum 500,000 cycles
- Forcing strength (in the opening direction) 1,940 lbs.
- Field reversible - fail secure / fail safe
- Door loading resistance, can operate under a pre-load condition (fail secure only)
- Non-handed
- Horizontal adjustment
- Internally mounted solenoid
- Continuous duty operation
- Plug-in connectors

Electrical:

12VDC .45 AMPS
24VDC .24 AMPS

Options:

LBM Latchbolt Monitor
2001 Rectifier for AC Operation



7501



7505

HOW TO ORDER

7501-12DC BLK

Model	Voltage	Finish	
7501	12DC	BLK	Black
7505	24DC	605	Bright Brass
		606	Satin Brass
		612	Satin Bronze
		613	Oil Rub Dk Bz
		630	Stainless Steel
		651	Bright Chrome

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213