


LCN 5030 SERIES


TABLE OF SIZES Select closer based on width of door.
 5030 Series cylinders available in size 1, 2, 3, 4, 5, or 6.
 Closing power of all 5030 Series closers may be increased 50%.
 Specify next higher size closer where strong drafts exist.

→ Indicates recommended range of door width for closer size.
 Note: Minimum door width 28" (711 mm).

EXTERIOR (and VESTIBULE) DOOR WIDTH

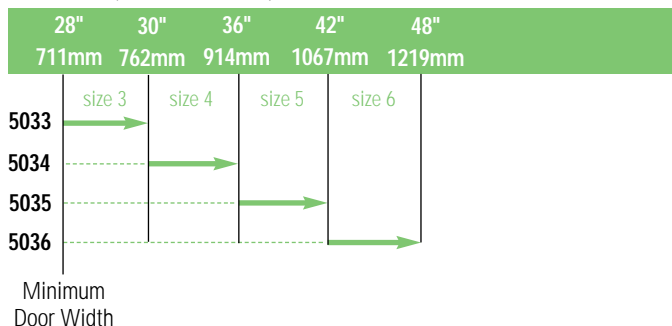


INTERIOR DOOR WIDTH

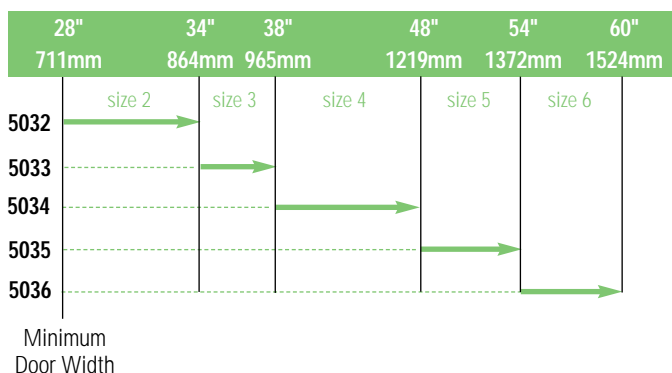

REDUCED OPENING FORCE 5030 CLOSERS

CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.

Refer to POWER OPERATORS section for information on systems that meet reduced opening force requirements without affecting closing power.

	DOOR WIDTH	36"	42"	48"
	8.5* lbs.	5032	5033	5033
	5.0* lbs.	5031	5031	5032

* Maximum opening force

HOW-TO-ORDER 5030 SERIES CLOSERS

1. SELECT CYLINDER SIZE

- 5031
- 5032
- 5033
- 5034
- 5035
- 5036

2. SPECIFY HAND

- RH
- LH

3. SPECIFY FINISH

- Standard Powder Coat _____
Aluminum, Statuary, Light Bronze, Tan, Brass, Black, Dark Bronze
- Custom Powder Coat _____
- Plated Finish, US _____

Closer will be shipped with:

- REGULAR ARM,
- WOOD and MACHINE SCREW PACK,
- unless options listed below are selected.

CLOSER OPTIONS

ARM

- Hold-Open
- H180 Hold-Open

SCREW PACK

- Thru Bolt (TB*) and Machine Screw
- TB*, Wood & Machine Screw
- TORX Machine Screw
- TB* & TORX Machine Screw
- * Specify door thickness if other than 1 3/4".

INSTALLATION ACCESSORIES

- Wood Clip Set, 5030-416
- Wood Clip Set, 5030-417

SPECIAL TEMPLATE

- ST- _____