



# ALARM LOCK



Page

- 2. Model 250, 260, 700 and 710 Panic Exit Alarms
- 3. Model 715 Delayed Egress Exit Alarm
- 3. Model 11A Emergency Exit Alarm
- 3. Model 103 & 104RA Electric Locks
- 4. PG10, PG21 & PG30 Pilfer Guard Siren Locks
- 5. Trilogy DL2700 Series Digital Locks
- 6. Trilogy DL2800 Series Digital Locks
- 7. Trilogy DL3000 Series Digital Locks
- 8. Trilogy DL3500 Series Digital Locks
- 9. Trilogy PDL3000 & PDL3500 Series Prox Locks
- 10. Options & Accessories for Prox & Digital Locks
- 11. Door Strikes, Door Loops & Transformers
- 12. Model CEM & CER Cylinders
- 12. Model 707, 22 & 711 Pulls
- 12. PP100 & AC9 Battery Eliminator



*Complete Door Hardware Solutions*

Mid West 1-800-522-2940

FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371


South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

# PANIC EXIT ALARMS

250, 260, 700 & 710 Models



# ALARM LOCK

## 250, 260, 700 & 710 PANIC EXIT ALARM DEADLOCKS



200 Series



700 Series

### Model 250, 260, 700 and 710

The Models 250, 260, 700 and 710 are U.L. Listed Panic Alarm deadbolt devices which restrict unauthorized use of exit doors by sounding an alarm, yet provide immediate opening in emergencies. Door can be protected by the high security deadlatch alone or choose the deadbolt for extra security.

All four models feature a powerful 95db dual piezo alarm, 9-volt battery, low battery alert, inside/outside cylinder capability, non-handed ease of installation and choice of metallic silver, duronodic, or red finishes. The Models 250 and 700 provide changeable 2 minute alarm cutoff or manual reset. The Models 260 and 710 provide changeable 2 minute auto reset or manual restore.

Optional A.C. power supply, monitoring option, and exterior trim available. Requires standard rim cylinder (not included).

### Specifications:

Cover - Die cast lock cover

Dimensions - 250/260: 18"W x 8-1/2"H x 3-1/4"D (24"W when using extended clapper plate).

700/710: 33"W x 8-1/2"H x 3-1/4"D (48"W model available).

Weight - 9 lbs. Shipping weight is 10 lbs.

### Specifications (continued):

Mounting Height: Center of unit should be approximately 38" from the floor.

### Special Features:

250/700 Models have changeable 2 minute alarm cutoff or manual reset.

260/710 Models have changeable 2 minute auto reset or manual reset.

"88" Option includes SPDT relay output for external monitoring.

### Power:

9VDC - Alkaline battery (use optional "AC9" or "PP100" for A.C. power with battery backup).

Current - Standby, 7 milli amps typical.

Battery Life - One year standby typical. 200 alarm sequences typical, or constant alarm 7 hours typical.

Lock Bolt - 1" throw, heavy die cast zinc alloy with reinforced steel inserts.

Sound Pressure Level - 95DB dual Piezo horn, measured at 10".

Operating Temperature - 20° F to 135° F (7° C to 57° C).

## HOW TO ORDER

**260-88-AL**

Model	Description	Option (You may combine options)		Finish	
250	Clapper Type	88	Monitoring Option	AL	Aluminum
260	Clapper Type W/Auto Reset	Long	Long Clapper (250/260) or channel (700/710)	DB	Dark Bronze
700	Bar & Channel Type	AC9	9VDC Power Supply (order separate)	RED	Red
710	Bar & Channel Type W/Auto Reset	PP100	9VDC Power Supply w/ Battery Backup (order separate)		

Mid West 1-800-522-2940

FAX 1-800-782-1160


JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



# ALARM LOCK

## EXIT ALARMS & LOCKS

Models 715, 11A, 103 & 104RA

### 715 DELAYED EGRESS EXIT ALARM

Model 715 Bar

Stylish cost-effective control of unauthorized use of exit doors!

Features:

- 15-Second delayed egress with instant 95 DB dual Piezo alarm meets UL specifications).
- Instant alarmed exit in case of actual emergency or fire. (Meets NFPA 101 Life Safety Code).
- Monitoring output - for simultaneous use of CCTV Camera Secondary Siren, Remote Monitoring Console, Etc.
- 9-Volt battery back-up powers siren in event of power failure.
- Low battery alert.
- Attractive designs compliment any decor - available in aluminum or duronodic finishes.
- Includes warning sign, armored door loop & 10' wiring harness input for local 2-wire smoke detector easy to install.
- Self-contained surface mount unit operates as a regular panic device when unarmed.

Accessories:

- SWK715 - Surface wiring kit for use on glass or wood doors.
- ALSD2451 - 2 wire smoke detector.
- 715SM - Audible siren module.
- 277-12 - Transformer, 277VAC to 12VAC with wired junction box.



715 Series

### HOW TO ORDER

**715-88-AL**

Model	Description	Options	Finish	
715	Bar & Channel Type	88 Monitoring Option	AL	Aluminum
			DB	Dark Bronze

### EMERGENCY EXIT ALARM

Model 11A

Model 11A is a security device designed to control unauthorized use of emergency exit doors. Easier to operate than the previous Model 11, this improved version maintains maximum security while complying with standard safety, fire and building codes. It provides trouble free service and deters theft from within and outside as well as permitting instant exit in case of emergency. Unauthorized use of protected door by depressing clapper, sounds alarm which can only be reset or bypassed by key.



Standard features include a 1 inch throw deadbolt, warning alarm, outside cylinder capability, tamper switch and long life battery pack. Can be specially ordered for remote monitoring, double doors or for use with existing panic bars. Optional A.C. power supply. Requires standard RIM cylinder (not included).


### ELECTRIC LOCKS

Model 103 & 104RA

Model 103 and 104RA are compact electric locks simple to install on all types of doors or windows. The door is locked or unlocked by remote switch, key switch, time programmer or other electrical contact which interrupts the power. Model 103 is our standard "fail-safe" unit which projects the bolt only while power is "on." When the power is off the bolt retracts. Lock and keepers are painted aluminum, cover is US32D stainless steel. Dimensions are 1-3/4"W x 6-3/4"L.

Model 104RA (reverse action), unlike the standard unit, is "fail secure" and will project the bolt only when the power is "off." When the power is "on" the bolt retracts. Optional monitoring function available: Specify Model 103x88 or 104x88.

Power Requirements: 400mA@24V AC or DC.  
12V Unit is Optional.

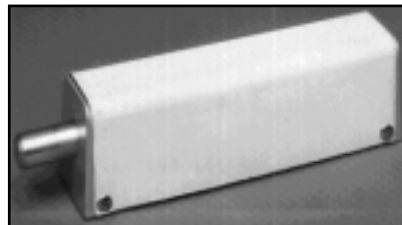


Mid West 1-800-522-2940  
FAX 1-800-782-1160



South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale 3095 Mullins Court Oxford, MI 48371

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



## PG10, PG21 & PG30 PILFER GUARD SIREN LOCKS

PG10



PG21



PG30KPD



## Siren Locks

### PG10

- Twin Action Horns
- Easily Installed

The Pilfergard Model PG 10 is an exit door alarm designed to deter the use of the secured door by sounding a twin action alarm when opened by unauthorized personnel. However, the alarm can be bypassed from inside or outside by approved key carrying employees. This unit is easily surface mounted, durable and contains two separate types of tamper proof switches. Test button verifies battery Optional A.C. power supply available. Requires standard mortise cylinder (not included).

### LL1

PG10 unit with addition of a flashing strobe for easy alarm identification.



LL1

### PG21

- Piezo Sounder - 9.5 db
- 9 Volt Alkaline Battery with Low Battery Alert
- Narrow Stile Design

The Pilfergard PG21 is a sleek, modern design door alarm preferred in high visibility areas, and for use with narrow stile doors. The piercing 95db piezo sounder can be user selected for continuous alarm or 2 minute shutdown with auto reset. Unauthorized use of door will cause alarm to sound as well as flashing LED. Only key carrying employees can disable the alarm. Features include test button, low battery alert, programmable exit/entry delay, inside and outside key control, and two types of tamper proof switches. Finished in choice of metallic silver or bronze. Optional A.C. power supply available. Requires standard mortise cylinder (not included).

### PG21E

PG21E unit can be remotely monitored. Provides a "closed circuit" contact for coverage of additional doors/windows.

### PG30

- Multi-sound Piezo Sounder
- 9 Volt Alkaline Battery and Low Battery Alert
- Narrow Stile Design

The PG30 has all the features of the PG21E with the exception of not having a mechanical key cylinder. Instead it incorporates a keypad that allows multiple levels of security and easy code changes. The PG30 allows up to 3 security levels. The optional PG30KPD external keypad can be used to remotely disarm the unit. Finished in choice of metallic silver or bronze. Optional A.C. power supply available.




Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



# ALARM LOCK

## KEYLESS ENTRY LOCKS

DL2700 Series Digital Locks

### TRILOGY DL2700 SERIES DIGITAL LOCKS

#### DL2700 Series Digital Locks



Trilogy DL-2700 Electronic Digital Locks offer the flexibility of a PC-based access control system for virtually the same cost as most mechanical digital locks. The completely self-contained, battery-powered DL-2700 is easy to install because it uses the same door prep (mounting holes) as most standard cylindrical knob sets. It can be used as a keyed or keyless lock

system, with master key and unique master code capabilities. And, because Trilogy models employ positive "Flex-Drive" motor locking, there are no mechanical chambers to replace or solenoids to bind.

Trilogy offers millions of possible code combinations. Codes can be simple or complex. Furthermore, the provision for high security multi-digit codes, combined with its temporary tamper shutdown feature makes it virtually impossible to "pick" the DL2700's code.

The Trilogy DL2700 requires no programming tools nor programmer, since it is fully keypad programmable. Trilogy's 3 level user hierarchy allows for "cross-keying" security, with a master code acting like a dormitory superintendent's pass key, the management code acting as a floor supervisor's pass key, and the multiple user codes acting as students' individual room keys. In fact, one standard Trilogy model can be set for three different functions: passage, classroom and storeroom.

#### Features and Benefits:

- Keypad programmable. No separate programmer required.
- Leverset and knobset models available in choice of US3 Polished Brass, US26D Satin Chrome or US5 Antique Brass.
- Leversets comply with ADA Specifications.
- "IC" leverset models available which accommodate Best, Arrow and Falcon interchangeable cores for high security key bypass.
- Key bypass, standard or interchangeable core.
- Operates on two 9V alkaline batteries, supplied. (Approximately 40,000 cycles/typical battery life).
- Accommodates 1-5/8" to 1-7/8" doors with a 2-3/4" backset (requires 1" bore on latch).
- Audible low battery warning.
- Operating temperature from -20° F to 130° F.
- Three security levels: a) Master, 1 code. b) Management, 1 code. c) User, 15 codes.
- Programmable passage function - the master code may be entered so any door can remain unlocked or passage doors may be relocked.
- Master and management codes can set entry allowance from 5 to 20 seconds.
- One time emergency access/service code permits access once and then automatically erases.
- Individual, group or total user code lockouts. Master and management codes can temporarily or permanently change individual, group or all user codes.
- 2 wire remote override (requires no extra power supply).
- Grade 1 Lockset, 3hr. UL fire rated deadlatch (UL78E5), FCC Certified; meets or exceeds ANSI/BHMA certification requirements for A156.2 Series 4000 Grade 1.

#### HOW TO ORDER

#### DL2700 50-KO-US5

Model		Design		Key		Finish	
DL2700	Trilogy Lock	50	Knob	KO	Key Override (Std Cylinder)	US5	Antique Brass
		00	Lever	IC	Interchangeable Core Key Override	US26D	Dull Chrome

Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371




South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

# KEYLESS ENTRY LOCKS

DL2800 Series Digital Locks



# ALARM LOCK

## TRILOGY DL2800 SERIES DIGITAL LOCKS

### DL2800 Series Digital Locks



Trilogy DL2800 is an economical stand alone access control system with audit trail. This pushbutton lock is ideal for both indoor and outdoor applications.

Rugged, all metal keypad is vandal resistant. It has 12 programmable buttons for multi-level access functions including group or individual user codes, master and management codes, passage and emergency or service code, lockout and remote override

capability and allowable entry time from 5-15 seconds.

Durable clutch mechanism permits turning lever without retracting latch and reduces stress on lock bodies and spindle. Outside lever is free turning in locked position. Entering access code, key bypass or remote bypass will allow lever to retract latch. Inside lever always instant egress. Easy to install. Retrofits most cylindrical locksets and digital locks.

### Features and Benefits:

- Rugged clutch mechanism insures long life & durability.
- 150 scheduled events, including 4 "quick schedules" for programming the 4 most common time schedules in 1 step.
- 200 user codes including: master, manager, supervisor and basic users. Also one-time entry code.
- Weather resistant performance with operational temperature range of +151°F to -20°F.
- Times entry allowance from 5-15 seconds.
- Greater security with "Temporary Keypad Lockout" after 3 unsuccessful code-entry attempts.
- Audit trail with time/date stamp for a printable record of all electronic activity.
- Real time clock allows logging of events to within 1 second of accuracy.
- Relay may be programmed to energize when one or more selected events occur.
- 4 time-out functions allow a user to enable other users or unlock the lock for some time period without needing to return to the lock.
- 1000 event log.
- Battery operated; uses 5 AA batteries.
- Available in standard key override and interchangeable core models accepting 6 or 7 pin cores from Arrow, Best, Falcon, or KSP. Other IC core preps available.

### HOW TO ORDER

#### DL2800 50-KO-US5

Model		Design		Key		Finish	
DL2800	Trilogy Lock	50	Knob	KO	Key Override (Std Cylinder)	US5	Antique Brass
		00	Lever	IC	Interchangeable Core Key Override	US26D	Dull Chrome


Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



### TRILOGY DL3000 SERIES DIGITAL LOCKS

#### DL3000 Series Digital Locks



Trilogy DL3000 non-handed stand alone access control systems with Audit Trail feature is for indoor or outdoor applications. Clutch mechanism permits turning of lever without retracting latch and reduces stress on lock bodies and spindle. Entering access code, key bypass or remote bypass will allow lever to retract latch. Inside lever is always instant egress.

All metal keypad has 12 programmable buttons for multi-level access functions. These functions include group or individual user codes, master and management codes, passage and emergency or service code, lockout and remote override capability and allowable entry time from 5 to 15 seconds.

#### Features and Benefits:

- DL3000WP waterproof version available. Operating temperature -20°F to 150°F.
- 300 user codes: master, manager, supervisor & basic users.
- 4 programming levels. 4 user groups.
- 3,4,5 or 6 digit codes.
- 1-time service code.
- Real time clock.
- Time zones.
- 150 scheduled events (lock/unlock, code disable/enable).
- 4 "Quick Schedules" of the most common routines built-in.
- 100% fingertip programmable or PC programmable with intuitive-use Alarm Lock DL-WINDOWS, Windows software with built-in error check.
- Non-volatile memory.
- 1600 event log.
- Passage mode enabled by master's and manager's codes.
- Optional hand-held AL-IR1 infrared printer may be used to print the event log and user code list.
- ADA compliant leverset clutch design.
- UL-Listed electrically-controlled single point lock.

### HOW TO ORDER

#### DL3000-KO-US5

Model		Key		Finish	
DL3000	Trilogy Lock	KO	Key Override (Std Cylinder)	US3	Polished Chrome
DL3500WP	Trilogy Lock Weather Proof	IC	Interchangeable Core Key Override	US5	Antique Brass
				US10	Duronodic
				US26	Polished Chrome
				US26D	Dull Chrome

Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371




South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

# KEYLESS ENTRY LOCKS

DL2800 Series Digital Locks



# ALARM LOCK

## TRILOGY DL3500 SERIES DIGITAL LOCKS

### DL3500 Series Digital Locks



DL3500 series are advanced high-security electronic mortise digital locks with audit trail and timed locking.

Authorized digital code enables outside lever to retract latchbolt, deadlocking latch and deadbolt, where applicable. Inside lever is always in passage mode and permits instant egress.

Weatherproof all metal keypad has 12 programmable

buttons for multi-level access functions. Models are handed and this must be specified when ordering. Trim is non-handed. Lock body is field reversible.

### Features and Benefits:

- 300 user codes: master, manager; supervisor; basic users.
- Weatherproof and operates from -20 to 151 degrees F (-29 to 66 degrees C).
- Fingertip or Windows PC programmable.
- Real time clock enables up to 500 scheduled events and holiday schedules.
- 40,000 event audit trail provides a printed time/date stamped log of all electronic activity.
- Audit trail polling to handheld infrared printer, PC or data transfer module.
- Standalone access control system with long-life batteries and low battery alert.
- Choose either left or right-handed, classroom or deadbolt function models.
- Exceptionally durable with both strong clutch mechanism and stainless steel latchbolt and deadbolt (where applicable).
- "Quick Passage" mode enabled with any authorized user codes and function code (does not require lock be in program mode).

### HOW TO ORDER

#### DL3500-KO-US5

Model		Key		Finish	
DL3000	Trilogy Lock Weather Proof	KO	Key Override (Std Cylinder)	US3	Polished Chrome
		IC	Interchangeable Core Key Override	US5	Antique Brass
				US10	Duronodic
				US26	Polished Chrome
				US26D	Dull Chrome

Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



# ALARM LOCK

## KEYLESS ENTRY LOCKS

Trilogy® PDL3000 & PDL3500 Prox Locks

### TRILOGY® PDL3000 & PDL3500 PROX LOCKS

Trilogy® PDL3000 Prox Lock  
Combination proximity and digital lock.

Trilogy® PDL3500 Prox Mortise Lock  
Rugged mortise lock trim combined with digital and/or Prox card access.

Features and Benefits:

- Accepts most HID proximity cards and keyfobs.
- 2000 user codes: master; manager; supervisor; basic user.
- Users are individually programmed to use a card only, code only, or for the highest security- both card and code.
- Card data can be added to software via the lock, card reader module or PC.
- Batch enroll allows many cards to be added quickly to the software via the lock with the use of PC.
- Weatherproof and operates from -20° F to 151° F (-29° C to 66° C).
- Fingertip (keypad) or Windows PC programmable.
- 500 scheduled events/schedules and up to 40,000 event Audit Trail that can be printed to AL-IR1 infrared printer or AL-DTM (data transfer module) or AL-PCI (PC interface).
- Comes with either a standard or Regal curved handle trim.



PDL3000



PDL3500

### HOW TO ORDER

#### PDL3500-KO-US5

Model		Key		Finish	
PDL3000	Prox Lock	KO	Key Override (Std Cylinder)	US3	Polished Chrome
PDL3500	Mortise Prox Lock	IC	Interchangeable Core Key Override	US5	Antique Brass
				US10	Duronodic
				US26	Polished Chrome
				US26D	Dull Chrome


Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



## OPTIONS & ACCESSORIES

### ETDL & ETPPL Trilogy Panic Trim Options:


Add Trilogy convenience and audit trail to panic exit trim!  
Also available with Built-in Prox Reader for HID Card and PIN access control!

### Features:

- Compatible with Von Duprin, Sargent, Yale, Corbin/Russwin, Dorma and Arrow.
- Fingertip and/or Windows programmable.
- 2000 user codes: master, manager, supervisor and users.
- Real time clock for up to 40,000 event time/date stamped audit trail.
- Up to 500 lock/unlock schedules (with time zone support).
- Rugged 12 button metal keypad and clutch mechanism.
- Weather resistant performance.
- Supports 6 or 7 pin IC rim cylinders.
- Five finishes; 2 ADA leverset styles.

ETDL - Trilogy panic trim keypad.

ETPPL - Trilogy panic trim pushbar.

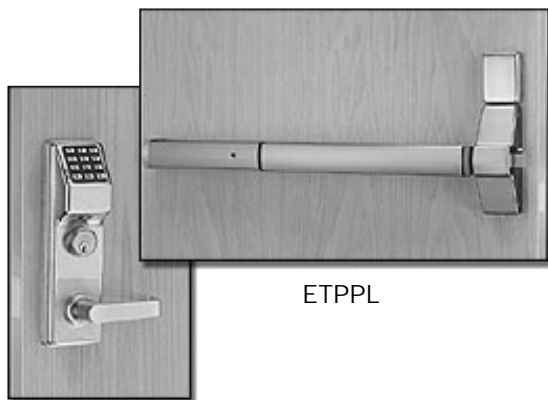

ETDL

ETPPL

### Accessories:

AL-IR1 - Infrared printer which prints the event log and user code with hand-held convenience.

AL-DTM - Data transfer module used to transfer program data from the PC to the lock and receive audit trail from the lock. Can transfer program data for up to 48 locks. Specify AL-DTM2 for PDL3000.

AL-PRE - Prox reader/enroller, for use with prox lock, enables instant, automatic enrollment of prox cards into DL-Windows. Just tap the prox card or fob device to the unit's faceplate to enroll. Supports all prox cards and fobs (supported by PDL3000). Simultaneous card enrollment, downloading or lock polling - all on just one serial port. Replaces AL-PCI, 9V battery operation.

DL-Windows - Windows format software used to create programming, manager, users and schedules, receive audit trail from lock, program the lock using PC or laptop, program the AL-DTM to program multiple locks and configure the AL-DTM to transfer data.

AL-PCI - Interface cable interconnects lock and PC for data transfer, *included with DL-Windows*.

AL-HID1326 - 100 pack HID cards.



AL-IR1

DL-Windows

AL-DTM


Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213



#### DOOR STRIKES, DOOR LOOPS & TRANSFORMERS

##### Single Door Strikes

Model 730

Supplied with models 250, 260, 700 and 710.

Model 725

Supplied with model 715.



Model 730


##### Double Door Strikes

Model 732

For use with models 250, 260, 700 and 710.

Model 735

For use with model 715 (not shown).

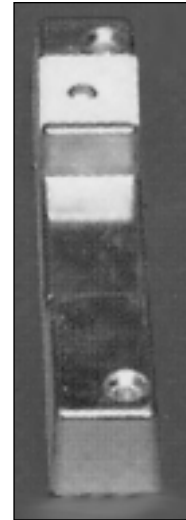

Model 732


##### Door Loops

Model 271

Model 271 armored door loop is for use with electrified locks.

An easy means for bringing electric current from the hinge side of a door frame to the door 18" flexible armored cable.

End brackets are deep drawn anodized aluminum to conceal wire connections.



Model 271

##### Transformers

Model 221

24 volt AC 30VA plug-in style.

Model 222

24 volt AC - 30VA wire-in style.

Model 241

24 volt DC - 500 plug-in rectified.

Model 277-12

277VAC to 12V with wired junction box.



Model 221 / 241



Model 222

Mid West 1-800-522-2940

FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371




South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

# ACCESSORIES


Cylinders / Door Pulls / Battery Eliminators



# ALARM LOCK

## CYLINDERS, #44 HOLDER, PP100, AC9, DOOR PULLS 707, 22, 711

### Cylinders

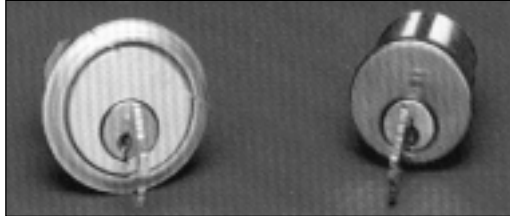

Model CER

Model CEM

### Model CER

Rim cylinder model CER. Required for interior arming/disarming of models IIA, 17, 25, 70, 250, 260, 700 and 710. Includes two keys (KA or KD).

### Model CEM

Mortise cylinder model CEM. Used with the Pilfergard models PG10 and PG20 to arm and disarm the alarm circuit. Includes two keys (KA or KD).

### Model 44 Double Door Holder

The double door holder secures the inactive door to the door frame while the active door is closed. Releasing the active door automatically allows both doors to swing freely. Reversible, right or left hand doors. Cast aluminum 8-1/2" long 3" wide 2-1/2" high.

### Model 44VRK Vertical Rod Kit

Vertical rod kit model 44VRK. Universally compatible, vertical rod kit secures outswinging double doors.



Model 44

### Model 707 Door Pull

Outside access door pull model 707 - For access from building exteriors. Installed on the outside of the door and linked to the lock. After deadbolt is retracted by outside key, a slight pull will release the lock and the deadlatch to open the door. 8" x 1-1/2" (for use with all models except model 11A). Available in silver (MS) or bronze (MB).



Model 707

### Model 22 Outside Emergency Pull

Outside emergency pull model 22 - to permit entrance from exterior roof or stairway doors in multiple story buildings.

### Model 711 Cylinder Finger Pull

Cylinder finger pull model 711 - an inexpensive door pull for use when outside key only access is required.

### Model 99 Narrow Stile Mounting Bars

Narrow stile mounting bars - model 99 (Pair) 3/8" x 1" anodized aluminum bar US28 finish. For mounting model 11A to narrow stile doors. Specify 36" or 48".



Model 22



Model 711

### Battery Eliminators

#### Model PP100


Battery eliminator model PP100 for use with all PG10, PG21, PG30, 200, 700, and 710 models. The PP100 conserves the battery which automatically takes over as the power source to sound the alarm in the event of a power failure or intentional power cut-off. A built in circuit breaker with pushbutton reset eliminates troublesome fuse replacements. Includes a cam lock cylinder and 6' of armored cable adequate to provide a door loop at the hinged- side of the door. Can be used with all 6V and 9V models.

#### Model AC9

Battery eliminator model AC9 for use with model PG21 Pilfergard, models 250, 260, 700, and 710.



Model PP100

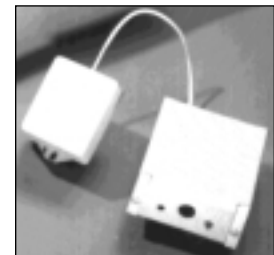

Model AC9

Mid West 1-800-522-2940  
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050  
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213