

SCHLAGE®



Page

2. AL Series Standard Duty Cylindrical Locks
3. AL Series Functions
4. ND Series Extra Heavy Duty Cylindrical Locks
5. ND Series Functions
6. ND Series Vandlgard Locks & Functions
7. ND Series Extra Heavy Duty Electrified Locks
8. L Series Extra Heavy Duty Mortise Locks
9. L Series Functions
10. L Series Escutcheons, Roses & Special Turns
10. L400 Series Strikes
10. L Series Lever and Knob Illustrations
11. L Series Extra Heavy Duty Mortise Electrified Locks
12. MPC Cobra Programmable Lock
13. B600 Series Deadbolts
14. Cylinders & Housings

JLM
WHOLESALE

Complete Door Hardware Solutions

Mid West 1-800-522-2940

FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371

South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

AL SERIES STANDARD DUTY CYLINDRICAL LOCKS

AL Series Standard Duty Locks

The AL Series keyed lever lock utilizes the Schlage original A Series cylindrical chassis with stylish lever designs supported by heavy duty spring cages. This design provides strength and performance in commercial Grade 2 applications. The AL Series is available in keyed or non-keyed functions. Lever designs are compatible with the complete family of Schlage ADA compliant commercial grade levers. Non-handed.

Applications:

Standard duty commercial exterior and interior doors for medical, office, hotel/motel, public buildings, religious, multi-family, retail/storefront and government facilities. Also ideal for heavy duty residential applications.

Keying:

6-pin keying is standard with two nickel silver keys per lock. Masterkeying, grand masterkeying and construction keying is available. Interchangeable core is available with Saturn levers.

Door Ranges:

1-3/8" to 1-7/8" standard.


Backset:

2-3/4" standard, 2-3/8" and 3-3/4" backset latches, and 5" backset links are also available.

Levers:

Jupiter (JUP), Neptune (NEP) and SATURN (SAT) - Pressure cast zinc lever; wrought brass or bronze rose.

See page 3 for function descriptions.

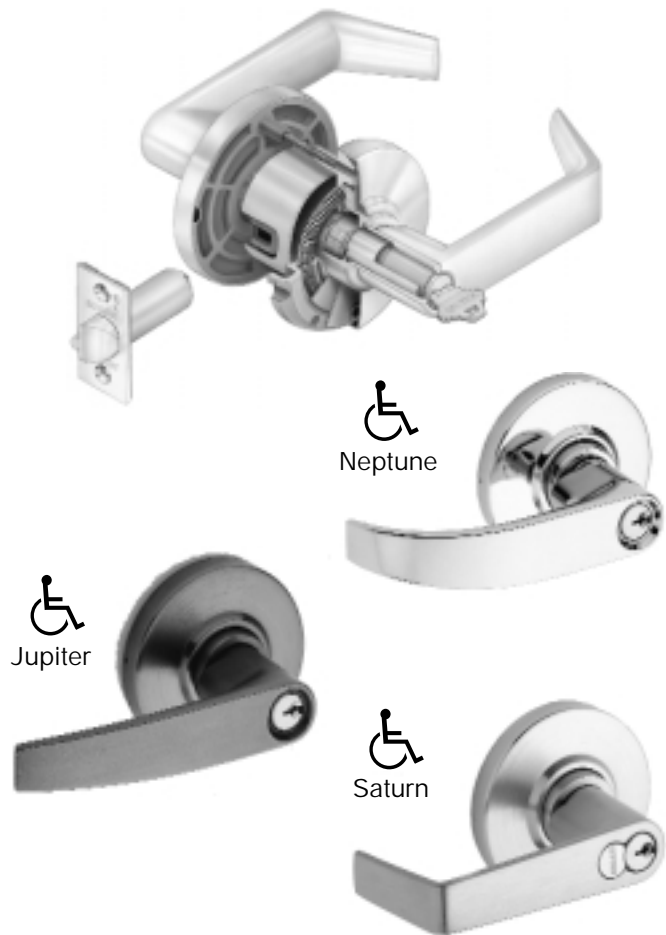

HOW TO ORDER

AL10S NEP 613

AL Functions		Lever Style		Finish	
AL10S	Passage Latch	JUP	Jupiter	605	Bright Brass
AL25D	Exit Lock	NEP	Neptune	606	Satin Brass
AL40S	Bath/Bed Privacy Lock	SAT	Saturn	609	Antique Brass
AL44S	Hospital Privacy Lock			612	Satin Bronze
AL170	Single Dummy Trim			613	Oil Rubbed Bronze
AL50PD	Entrance/Office Lock			625	Bright Chrome
AL53PD	Entrance Lock			626	Satin Chrome
AL70PD	Classroom Lock				
AL80PD	Storeroom Lock				
AL85PD	Hotel Lock				

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

AL SERIES FUNCTIONS

AL Series Functions, Non-Keyed Locks:

AL10S, Passage Latch - Both levers are always unlocked.



AL10S



AL25D

AL25D, Exit Lock - Blank plate outside. Inside lever is always unlocked.

AL40S, Bath/Bedroom Privacy Lock - Push-button locking. Can be opened from outside with small screwdriver. Turning inside lever or closing door releases button.



AL40S



AL44S

AL44S, Hospital Privacy Lock - Push-button locking. Unlocked from outside by turning emergency turn button. Turning inside lever or closing door releases button.

AL170, Single Dummy Trim - Dummy trim for one side of door. Used for door pull or as matching inactive trim.



AL170



AL50PD

AL Series Functions, Keyed Locks:

AL50PD, Entrance/Office Lock - Push-button locking. Push-button locks outside lever until unlocked with key or by rotating inside lever.

AL53PD, Entrance Lock - Turn/push-button locking; pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Push-button locking; pushing button locks outside lever until unlocked by key or by turning inside lever.



AL53PD



AL70PD

AL70PD, Classroom Lock - Outside lever locked and unlocked by key. Inside lever always unlocked.

AL80PD, Storeroom Lock - Outside lever fixed. Entrance by key only. Inside lever always unlocked.



AL80PD



AL85PD

AL85PD, Hotel/Motel Lock - Outside by key only. Push-button in inside lever activates visual occupancy indicator, allowing only emergency masterkey to operate. Turning inside lever or closing door releases visual occupancy indicator. Rotation of inside spanner button provides lockout feature by keeping indicator thrown.

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

ND SERIES

Extra Heavy Duty Cylindrical Locks

SCHLAGE®

ND SERIES EXTRA HEAVY DUTY CYLINDRICAL LOCKS

ND Series Extra Heavy Duty Locks

Commercial quality ND Series locks are specified when the highest standards of quality and performance are preferred. Designed for durability and function, precision manufactured to exact tolerances, the ND Series exceeds 3,000,000 cycles. The broad range of lever and knob styles and specialized functions satisfy virtually any cylindrical lock application. ND Series levers are designed for maximum accessibility and security, and are suitable for new and retrofit applications. Non-handed.

Applications:

Extra heavy duty residential, commercial, institutional and industrial applications.

Keying:

6-pin Everest C123 keyway is standard with two patented nickel silver keys per lock. Masterkeying, grand masterkeying and construction keying available. Interchangeable core is available with Athens, Rhodes, Sparta and Omega levers or Orbit knob.

Door Ranges:

Knob and decorative designs 1-3/8" to 2" standard. Lever designs 1-5/8" to 2" standard.

Backset:

2-3/4" standard. 2-3/8", 3-3/4" and 5" available.


Levers:

Athens (ATH), Omega (OME), Rhodes (RHO) and Sparta (SPA) - Pressure cast zinc lever; wrought brass or bronze rose.

Knobs:

Orbit (ORB), Plymouth (PLY) and Tulip (TUL) - Wrought brass, bronze or stainless steel.

See page 5 for function descriptions.

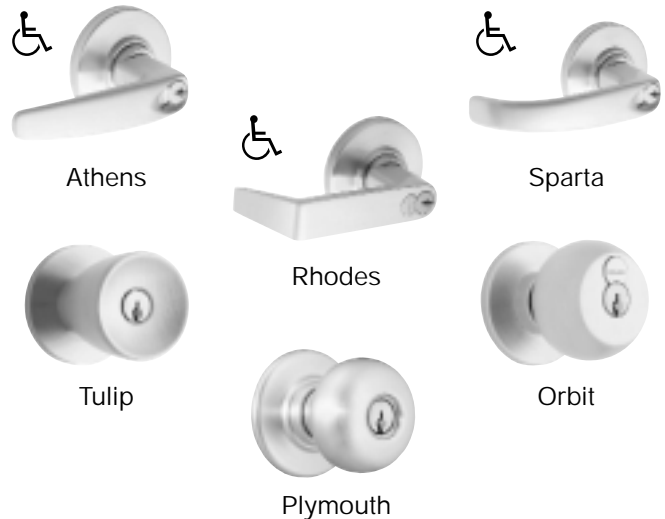

HOW TO ORDER					
ND10S ATH 613					
D Functions		Lever Style		Finish	
ND10S	Passage Latch	ATH	Athens	605	Bright Brass
ND12S	Exit Lock	SPA	Sparta	606	Satin Brass
ND25D	Exit Lock, Blank Inside	RHO	Rhodes	609	Antique Brass
ND40S	Bath/Bed Privacy Lock	OME	Omega	612	Satin Bronze
ND44S	Hospital Privacy Latch	Knob Style		613	Oil Rubbed Bronze
ND170	Single Dummy Trim	PLY	Plymouth	625	Bright Chrome
ND50PD	Entrance/Office Lock	TUL	Tulip	626	Satin Chrome
ND53PD	Entrance Lock	ORB	Orbit		
ND60PD	Vest./Class Sec. Lock				
ND66PD	Store Lock				
ND70PD	Classroom Lock				
ND73PD	Corridor Lock				
ND80PD	Storeroom Lock				
ND82PD	Institution Lock				
ND85PD	Hotel/Motel Lock				

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

ND SERIES FUNCTIONS

ND Series Functions, Non-Keyed Locks

ND10S, Passage Latch - Both levers are always unlocked.

ND12D, Exit Lock - Outside lever always fixed. Inside lever always unlocked.

ND25D, Exit Lock - Blank plate outside. Inside lever always unlocked.

ND40S, Bath/Bedroom Privacy Lock - Push-button locking. Can be opened from outside with small screwdriver. Turning inside lever or closing door releases button.

ND44S, Hospital Privacy Lock - Push-button locking. Unlocked from outside by turning emergency turn button. Turning inside lever or closing door releases button.

ND170, Single Dummy Trim - Dummy trim for one side of door. Used for door pull or as matching inactive trim.

ND Series Functions, Keyed Locks

ND50PD, Entrance/Office Lock - Push-button locking. Push-button locks outside lever until unlocked with key or by turning inside lever. For same lock in Vandlgard specify D91PD.

ND53PD, Entrance Lock - Turn/push-button locking; pushing and turning button locks outside lever, requiring use of key until button is manually unlocked. Push-button locking; pushing button locks outside lever until unlocked by key or by turning inside lever. For same lock in Vandlgard specify D92PD.

ND60PD, Vestibule/Classroom Security Lock - Latch retracted by key from outside when outside lever is locked by key in inside lever. Inside lever is always unlocked. For same lock in Vandlgard specify D93PD.

ND66PD, Store Lock - Key in either lever locks or unlocks both levers.

ND70PD, Classroom Lock - Outside lever locked and unlocked by key. Inside lever always unlocked. For same lock in Vandlgard specify D94PD.

ND73PD, Corridor Lock - Locked and unlocked by key from outside. Push-button locking from inside. Turning inside lever or closing door releases button.

ND80PD, Storeroom Lock - Outside lever fixed. Entrance by key only. Inside lever always unlocked. For same lock in Vandlgard specify D96PD.

ND82PD, Institution Lock - Both levers fixed. Entrance by key in either lever.

ND85PD, Hotel/Motel Lock - Outside lever fixed. Push-button in inside lever activates visual occupancy indicator, allowing only emergency masterkey to operate. Turning inside lever or closing door releases visual occupancy indicator. Rotation of inside spanner-button provides lockout feature by keeping indicator thrown.



ND10S / ND12D



ND40S



ND50PD/ND73PD/ND85PD



ND53PD



ND25D



ND44S



ND170



ND60PD/ND66PD/ND82PD



ND70PD/ND80PD

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

ND SERIES VANDLGARD

Cylindrical Locks & Functions

SCHLAGE®

ND SERIES VANDLGARD CYLINDRICAL LOCKS & FUNCTIONS

ND Series Vandlgard Locks:

Commercial quality ND Series Vandlgard locks are specified when the highest standards of quality and performance are preferred. ND Series levers are designed for maximum accessibility and security, and are suitable for new and retrofit applications. ND Series exceeds 3,000,000 cycles. Non-handed. Vandlgard is designed to disengage the outside spindle from the latch when in the locked condition. The locked outside lever freely rotates up and down while remaining securely locked. The free wheeling lever eliminates the ability to exert excessive force or to stand on the lever, preventing damage to internal lock components. Available in the entrance/office, classroom and storeroom functions in all of the D Series lever designs and finishes.

Applications:

Extra heavy duty residential, commercial, institutional and industrial applications.

Keying:

6-pin Everest C123 keyway is standard with two patented nickel silver keys per lock. Masterkeying, grand masterkeying and construction keying available. Interchangeable core is available with Athens, Omega, Rhodes and Sparta levers or Orbit knob.

Door Ranges:

Lever designs 1-5/8" to 2" standard.

Backset:

2-3/4" standard. 2-3/8", 3-3/4" and 5" available.

Levers:

Athens (ATH), Omega (OME), Rhodes (RHO) and Sparta (SPA) - Pressure cast zinc lever; brass or bronze rose.

ND Series Vandlgard Functions:

ND91PD, Entrance/Office Lock - Push-button locking. Push-button locks outside lever until unlocked with key or by rotating inside lever. Athens, Rhodes and Sparta designs only.

ND92PD, Entrance Lock - Turn/push-button locking; pushing and turning button locks outside lever, requiring use of key until button is manually unlocked. Push-button locking; pushing button locks outside lever until unlocked by key or by turning inside lever. Athens, Rhodes and Sparta designs only.

ND94PD, Classroom Lock - Outside lever locked and unlocked by key. Inside lever always unlocked. Athens, Rhodes and Sparta designs only.

ND96PD, Storeroom Lock - Outside lever always locked. Entrance by key only. Inside lever always unlocked. Athens, Rhodes and Sparta designs only.



ND91PD



ND92PD



ND94PD



ND96PD



Rhodes



Athens



Sparta

HOW TO ORDER

ND91PD ATH 613

D Functions		Lever Style		Finish	
ND91PD	Entrance/Office	ATH	Athens	605	Bright Brass
ND92PD	Entrance Lock	SPA	Sparta	606	Satin Brass
ND94PD	Classroom Lock	RHO	Rhodes	612	Satin Bronze
ND96PD	Storeroom Lock	OME	Omega	613	Oil Rubbed Bronze
				625	Bright Chrome
				626	Satin Chrome

Mid West 1-800-522-2940

FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

ND SERIES EXTRA HEAVY DUTY ELECTRIFIED LOCKS

ND Series Extra Heavy Duty Electrified Locks
Commercial quality ND Series locks are specified when the highest standards of quality and performance are preferred. Designed for durability and function, precision manufactured to exact tolerances, the ND Series is best suited for commercial, industrial and institutional use. ND Series levers are designed for maximum accessibility and security, and are suitable for new and retrofit applications. Non-handed. Rated for both fire and electrical single point locking applications on labeled openings by Underwriters Laboratories UL 199X.

Functions:

ND80PDEL, Electrically Locked (Fail Safe) - Outside lever continuously locked electrically.

Unlocked by key outside or by switch or power failure. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever always free for immediate exit.



ND80PDEU, Electrically Unlocked (Fail Secure) - Outside lever continuously locked until unlocked by key or electric current. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever always free for immediate exit.

Applications:

For use in security control centers, cashier rooms, fire safety alarms, stairwell doors, telephone equipment rooms, computer rooms, hospital equipment and narcotics areas.

Regulating Devices:

Security alarms, wall switches, security consoles, access control readers, thermo-sensitive devices, smoke and fire alarms, telephone access controls, automatic time devices and computerized controls.

Electrical Requirements:

Electrically locking: Amps .15; Volts 24 AC only.

Electrically unlocking: Amps .15; Volts 24 AC. Amps .35; Volts 24 DC. DC operation intermittent duty only.

Keying:

6-pin Everest C123 keyway is standard with two patented nickel silver keys per lock. Masterkeying, grand masterkeying and construction keying available. Interchangeable core is available with Athens, Omega, Rhodes and Sparta lever.

Door Ranges:

Lever designs 1-5/8" to 2" standard.

Backset:

2-3/4" standard. 2-3/8", 3-3/4" and 5" are available.

Levers:

Athens (ATH), Omega (OME), Rhodes (RHO) and Sparta (SPA) - Pressure cast zinc lever; wrought brass or bronze rose.

Knobs:

Orbit (ORB), Plymouth (PLY) and Tulip (TUL) - Wrought brass, bronze or stainless steel.

HOW TO ORDER

ND80PDEU 24VDC RHO 613

D Series Electric Functions		Voltage		Lever Style		Finish	
ND80PDEL	D Electrified Fail Safe	24	24VDC	ATH	Athens	605	Bright Brass
ND80PDEU	D Electrified Fail Secure	24	24VAC	SPA	Sparta	606	Satin Brass
				RHO	Rhodes	609	Antique Brass
				OME	Omega	612	Satin Bronze
					Knob Style	613	Oil Rubbed Bronze
				PLY	Plymouth	625	Bright Chrome Plated
				TUL	Tulip	626	Satin Chrome Plated
				ORB	Orbit		

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

L SERIES

Extra Heavy Duty Mortise Locks



L SERIES EXTRA HEAVY DUTY MORTISE LOCKS

L Series Extra Heavy Duty Mortise Locks

The L Series mortise lock is a heavy duty commercial mortise lock containing a wide variety of knob and lever designs. It is available in keyed or non-keyed functions. The L Series lock meets or exceeds the ANSI A156.13 specifications, making it the best choice for any building where security, safety and design compatibility are the prime considerations. The L Series lock uses one common mortise lock case for all trim. This allows excellent design flexibility in trim combinations.

Applications:

For commercial and institutional buildings.

Keying:

6-pin Everest C123 keyway is standard with two patented nickel silver keys per lock. Masterkeying, construction keying and interchangeable cores are available.

Door Ranges:

1-3/4" standard. Call for use with other door thicknesses.

Sizes:


Case Size 4-7/16" x 6-1/16" x 1".
 Armored Front 1-1/4" x 8" x 7/32" standard.
 1-1/16" x 8" x 7/32" optional.
 Deadbolt 1" throw, stainless steel.
 Latchbolt 3/4" throw.
 Backset Stainless steel with anti-friction tongue.
 2-3/4" only.

Levers:

01 and 02 - Forged brass and cast stainless steel.
 03, 05, 06, 07, 12, 17 and 18 - Forged brass bronze and cast stainless steel.
 93 - Extruded brass, bronze or stainless steel.

Knobs:

41 and 42 - Heavy wrought brass, bronze or stainless steel.



See page 9 for function descriptions & page 10 for trim, roses & escutcheons.

HOW TO ORDER						
L9010 03 L 626						
L Functions		Lever	Escutcheons/Roses		Finish	
L0170	Single Dummy	01	A	A Rose	605	Bright Brass
L0172	Double Dummy	02	B	B Rose	606	Satin Brass
L9010	Passage	03	L	L Escutcheon	609	Antique Brass
L9040	Privacy	05	N	N Escutcheon	612	Satin Brass
L9050	Office/Inner Entry	06			613	Oil Rubbed Bronze
L9056	Office/Inner Entry w/ SR	07			625	Bright Chrome
L9060	Apartment Entrance	12			626	Satin Chrome
L9070	Classroom	17				
L9080	Storeroom	18				
L9453	Entrance	93				
L9456	Corridor	Knob				
L9457	Classroom Security	41				
L9465	Closet/Storeroom	42				
L9466	Store/Utility Room					
L9485	Hotel					

Mid West 1-800-522-2940
 FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
 FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

L SERIES FUNCTIONS

L Series Functions, Non-Keyed Locks

L0170, Single Dummy Trim - Knob/lever on one side fixed by mounting bar.

L0172, Double Dummy Trim - Knob/lever on one side fixed by mounting bar.

L9010, Passage Latch - Latchbolt retracted by lever from either side at all times.

L9040, Bath/Bedroom Privacy Lock - Latchbolt retracted by lever from either side unless outside is locked by inside turn piece. Turning inside lever or closing door unlocks outside lever. To unlock from outside, remove emergency button, insert emergency turn (furnished) in access hole and rotate.

L Series Functions, Keyed Locks

L9050, Office and Inner Entry Lock - Latchbolt retracted by lever from either side unless outside is made inoperative by key outside or by turning inside thumbturn. When outside is locked, latchbolt is retracted by key outside or by lever inside. Outside lever remains locked until thumbturn is returned to vertical or unlocked by key. Auxiliary latch deadlocks latchbolt when door is closed.

L9056, Same as L9050 with Simultaneous Retraction - Latchbolt retracted by lever from either side unless outside is made inoperative by key outside or by rotating inside thumbturn. Outside knob/lever unlocked by key outside, thumbturn or closing door. Rotating inside knob, lever simultaneously retracts latchbolt and unlocks outside knob/lever. Auxiliary latch deadlocks latchbolt when door is closed.

L9060, Apartment Entrance Lock - Latchbolt retracted by lever from either side unless outside is locked by key from inside. When locked, latchbolt retracted by key outside or lever inside. Auxiliary latch deadlocks latchbolt when door is closed.

L9070, Classroom Lock - Latchbolt retracted by lever from either side unless outside is locked by key. Unlocked from outside by key. Inside lever always free for immediate exit. Auxiliary latch deadlocks latchbolt when door is closed.

L Series Functions, Keyed Locks (continued)

L9080, Storeroom Lock - Latchbolt retracted by key outside or by lever inside. Outside lever always inoperative. Auxiliary latch deadlocks latchbolt when door is closed.

L9453, Entrance Lock - Latchbolt retracted by lever from either side unless outside is locked by 20° rotation of thumbturn. Deadbolt thrown or retracted by 90° rotation of thumbturn. When locked, key outside or lever inside retracts deadbolt and latchbolt simultaneously. Outside lever remains locked until thumbturn is restored to vertical position. Throwing deadbolt automatically locks outside lever. Auxiliary latch deadlocks latchbolt when door is closed.

L9456, Corridor Lock - Latchbolt is retracted by lever from either side. Deadbolt thrown or retracted by key outside or inside thumbturn. Throwing deadbolt locks outside lever. Turning inside lever simultaneously retracts deadbolt and latchbolt and unlocks outside lever.

L9457, Classroom Security Lock - Latchbolt is retracted by lever from either side. Deadbolt thrown or retracted by key from either side. Throwing deadbolt locks outside lever. Turning inside lever simultaneously retracts deadbolt and latchbolt and unlocks outside lever.

L9465, Closet/Storeroom Lock - Latchbolt retracted by lever from either side. Deadbolt thrown or retracted by key outside.

L9466, Store/Utility Room Lock - Latchbolt retracted by lever from either side. Deadbolt thrown or retracted by key from either side.

L9485, Hotel Lock - Latchbolt retracted by key outside or by knob/lever inside. Outside knob/lever always fixed. Deadbolt thrown or retracted by inside thumbturn. When deadbolt is thrown, all keys become inoperative except emergency or display keys. Turning inside knob/lever retracts both deadbolt and latchbolt simultaneously. Auxiliary latch deadlocks latchbolt when door is closed.

Note: Not all available functions are shown. Please call for more information.



L9010



L9040



L9050



L9060



L9070/80



L9453




L9456




L9457/66



L9465



L0170



L0172



L9485

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

L SERIES

Trim, Escutcheons, Roses, Turns & Strikes

SCHLAGE®

L SERIES ESCUTCHEONS, ROSES, SPECIAL TURNS & STRIKES

Escutcheons:

L Full Face and L Concealed

Cold forged brass, bronze or stainless steel.

Size is 8" x 1-3/4" x 7/16".

N Escutcheon

Heavy wrought reinforced brass, bronze or stainless steel.

Size is 8" x 2-9/16" x 7/16".

Wrought Roses:

A 2-1/8" dia. for use with L Series knobs and levers.

B 2-9/16" dia. for use with L Series knobs and levers.

L400 Series Strikes:

10-078 1-1/4" x 4-7/8", square corner, box.

10-079 1-1/8" x 3-1/2", square corner, box.

Standard ANSI A115.5 preparation.

Special Turns:


Hotel Occupancy Indicator, 09-611 - For lock function L9468P, this unit is used with A or B design roses only. It requires a 1-3/8" cylinder for 1-3/4" doors.

Optional "EZ" Turn, L583-363 - Available for rose and escutcheon trim. Disability turn (ADA) option to standard thumbturn. Can be used with any thumbturn function L Series lock, except L9463 and L463.

Coin Turn, L283-124 - For lock functions L9044 and L9444 with rose trim.



A Rose



B Rose



L Full Face



L Concealed




N Escutcheon

L SERIES LEVER AND KNOB ILLUSTRATIONS



01



02



03



05



06



07



12



17



18



93*

Bent Extruded Bar Lever (Tubular)



41



42

Mid West 1-800-522-2940

FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

L SERIES EXTRA HEAVY DUTY MORTISE ELECTRIFIED LOCKS

L Series Extra Heavy Duty Mortise Electrified Locks
 The L Series electric mortise lock line is available in keyed functions. These are available with all trim designs.

Functions:

L9080EL, Electrically Locked (Fail Safe) - Outside knob/lever continuously locked by 24V AC or DC. Latchbolt retracted by key outside or by knob/lever inside. Switch or power failure allows outside knob/lever to retract latchbolt. Auxiliary latch deadlocks latchbolt when door is closed. Inside knob/lever always free for immediate exit.

L9080EU, Electrically Unlocked (Fail Secure) - Outside knob/lever unlocked by 24V AC or DC. Latchbolt retracted by key outside or by knob/lever inside. Auxiliary latch deadlocks latchbolt when door is closed. Inside knob/lever always free for immediate exit.

Applications:

For use in security control centers, cashier rooms, fire safety alarms, stairwell doors, telephone equipment rooms, computer rooms, hospital equipment and narcotics areas.

Electrical Requirements:

Voltage: 24V AC or DC (Maximum 29V, Minimum 20V).
 Peak Current: Amps 1.3 at 5 to 10 second intervals.
 Holding Current: Amps .135 between peak current intervals.

Keying:

6-pin keying standard with two nickel silver keys per lock. Masterkeying, construction keying and interchangeable cores are available.

Door Ranges:

1-3/4" standard. Call for use with other door thicknesses.

Backset:

2-3/4" only.

Levers:

01 and 02 - Forged brass and cast stainless steel.
 03, 05, 06, 07, 12, 17 and 18 - Forged brass bronze and cast stainless steel.
 93 - Extruded brass, bronze or stainless steel.

Knobs:

41 and 42 - Heavy wrought brass, bronze or stainless steel.



HOW TO ORDER						
L9080PEU 24VDC 06 613						
L Series Lock		Voltage		Lever	Finish	
L9080PEL	L Electrified Fail Safe Lock	24	12VAC	01	605	Bright Brass
L9080PEU	L Electrified Fail Secure Lock	24	24VDC	02	606	Satin Brass
				03	609	Antique Brass
				05	612	Satin Brass
				06	613	Oil Rubbed Bronze
				07	625	Bright Chrome
				12	626	Satin Chrome
				17		
				18		
				93		
				Knob		
				41		
				42		

Mid West 1-800-522-2940

FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050

FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

MPC COBRA PROGRAMMABLE LOCK

MPC Cobra Programmable Lock

Cobra by Schlage is an architecturally designed, battery operated, programmable locking system. A concealed emergency override gives you additional flexibility to tie into existing SFIC keying systems.

Applications:

This attractive, battery powered electronic cylindrical lockset is ideal for new construction or retrofit applications where aesthetics are important and program flexibility at the lock is critical. An excellent choice for schools, hospitals, multi-family units, retail stores, and commercial and government facilities looking to upgrade to access control from mechanical locks or other manufactures' locks.

Features:

- 100 3 to 8-digit user codes.
- User codes can be entered right at the keypad.
- Red and green LED indicators.
- Extended 2-3 year battery life.
- Compact cast escutcheon with integrated keypad.
- Vandlgard clutching lever.
- 1/2" latchbolt.
- Accommodates 1-1/2" to 2" door thickness.
- 1 year warranty.

Accessories:

MPC-LRP - 2 cover plates in stainless steel finish to mask preps left from other locksets, for 1-3/4" doors only. Mount behind inside and outside escutcheons.

MPC-SK - 1/8" thick shim plate in stainless steel finish to accommodate 1-3/8" residential doors. Mounts behind inside escutcheon.

Backset:

2-3/4" with 1/2" latchbolt standard.

2-3/4" with 3/4" latchbolt optional, specify ELB.

2-3/8" with 1/2" latchbolt optional, specify OLB.

Levers:

Choose from lever 06 or lever 17.

Handing:


Field reversible. Shipped as RH unless otherwise specified.



06 Lever



17 Lever

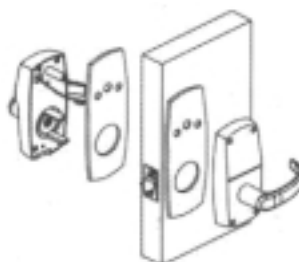

MPC-LRP



MPC-SK

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

B600 SERIES DEADBOLTS



B600 Series Deadbolts

Schlage's B600 Series are industry-leading deadbolts. Built to withstand the demands of the toughest commercial applications, this series is also recommended for residential use. Meets all ANSI 156.5 Grade 1 requirements, with security and strength features. These features include solid brass or bronze 7/8" rotating trim rings, 1/4" diameter thrubolts and a high-strength, solid steel alloy deadbolt. Bolts are made of a strong steel alloy, containing a hardened steel roller to prevent cutting or sawing. Mounting screws are protected against drilling by hardened steel balls. It includes our exclusive wood frame reinforcer. 2-3/4" backset standard, 2-3/8", 3-3/4" and 5" available. Available in solid brass or bronze trim with pressure cast zinc thumbturn, plated to match finishes indicated.

Applications:

Auxiliary and primary locking for residential and commercial buildings. B600 Series deadlocks are designed to meet various security door preparations and functional requirements as determined by local codes and life safety regulations.

Keying:

6-pin keying with two nickel silver keys per lock. Masterkeying and construction keying are available. Also available with interchangeable core.

Door Range:

1-3/4" to 2" standard. Please call for other door sizes.

Functions:

B660P, Single Cylinder Deadbolt - Deadbolt thrown or retracted by key from outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.

B661P, One-Way Deadbolt Lock - Deadbolt thrown or retracted by key only. Blank plate inside. Bolt automatically deadlocks when fully thrown.

B662P, Double Cylinder Deadbolt Lock - Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.

B663P, Classroom Deadbolt Lock - Deadbolt thrown or retracted by key outside. Inside turn unit will retract bolt only. Bolt automatically deadlocks when fully thrown.

B664P, Cylinder Lock - Deadbolt thrown or retracted by key from one side. No inside trim. Bolt automatically deadlocks when fully thrown.

B680, Door Bolt - Deadbolt thrown or retracted by turn unit only. No outside trim. Bolt automatically deadlocks when fully thrown.

HOW TO ORDER

B661P 613

Deadbolt Functions		Finish	
B660P	Single Cylinder Deadbolt	605	Bright Brass
B661P	One-Way Deadbolt Lock	606	Satin Brass
B662P	Double Cylinder Deadbolt Lock	609	Antique Brass
B663P	Classroom Deadbolt Lock	612	Satin Bronze
B664P	Cylinder Lock	613	Oil Rubbed Bronze
B680	Door Bolt	625	Bright Chrome
		626	Satin Chrome



B660P



B662P



B661P



B663P



B680



B664P

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213

CYLINDERS & HOUSINGS FOR AL, B600, D & L SERIES LOCKS

Cylinders

Schlage locks are provided with cylinder units precision built to extremely close tolerances and the highest standards of accuracy. Using only solid brass cylinder cores, extruded brass housings, phosphor bronze springs and nickel silver keys and pins, ensures long life and ease of operation. Schlage interchangeable core cylinders allow immediate rekeying of a lock without the time and expense of repinning cylinders.

AL Series Cylinders:

- 21-020 Standard lever cylinder.
- 21-021 Hotel function cylinder.
- 23-030 Interchangeable core for Saturn levers.

B600 Series Cylinders & Housings:

- 22-642 B661 or B664 with a 1-3/8" to 2" door range.
- 22-643 B661 or B664 with a 2" to 2-1/2" door range.
- 22-644 B660 or B663 with a 1-3/8" to 2-1/2" door.
- 22-645 B662 with a 1-3/8" to 2" door range, 2 req.
- 22-645 B662 with a 2" to 2-1/2" door range, 2 req.
- 23-030 Interchangeable core.
- B610-024 Dummy cylinder housing.
- B610-025 Outside cylinder housing.
- B610-027 Outside housing, full size IC core.
- B610-028 Inside housing, full size IC core.
For use with deadbolt.

D Series Cylinders:

- 23-065 6-pin conventional, standard.
- 20-765 Primus high security.
- 20-565 Primus UL437 Listed high security.
- N123-041 Temporary construction plug, plastic for functions.
- N523-100 Cylinder sleeve for locks ordered less cylinder.

L Series Cylinders & Housings:

- 20-001 Cylinder with compression ring for L9060 and other straight cam applications. Use w/ Rose trim.
- 20-062 Full size interchangeable core mortise cylinder with compression ring. Use w/ Adams Rite locks.
- 23-030 Full size interchangeable core.
- 26-021 Outside cylinder less compression ring for L9060 and other straight cam functions. Use with L & N escutcheons.
- 30-001 Standard full face cylinder with compression ring. For all Schlage L Series except L9060.
- 30-002 For hotel function locks with compression ring. Specify door hand.
- 30-007 Full size housing with compression ring, less core.
- 30-008 Full size interchangeable core mortise cylinder unit with compression ring.
- 30-016 Full size IC housing only, less core.
- 30-021 Standard full face cylinder less compression ring, 1-1/8" to 1-3/4".
- 30-022 For hotel function locks less compression ring. Specify door hand.
- 30-030 Full size IC cylinder and compression ring for L9060.
- 30-137 Full size IC housing less core with compression ring and 3/8" blocking ring, Rose trim.
- 30-138 Full size IC mortise cylinder with compression ring and 3/8" blocking ring. Use with Rose trim.

Rim Cylinders:

- 20-022 Standard rim cylinder.
- 20-057 Interchangeable core rim cylinder.




23-001




Compression Ring



30-008




21-020




21-021



23-003



23-014



23-030

Mid West 1-800-522-2940
FAX 1-800-782-1160

JLM Wholesale 3095 Mullins Court Oxford, MI 48371



South East 1-800-768-6050
FAX 1-800-824-6051

JLM Wholesale SE 7517-A Orr Rd. Charlotte, NC 28213